



# Product Profile Dimensions

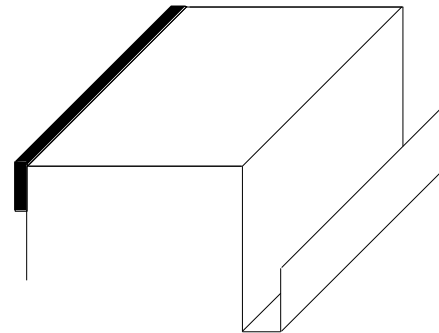

## PS61 - "DJR" Double J-Runner (Shaft Wall) Profile

Composite Fire Stop/Framing for use in up to 2hr rated wall assemblies, up to 1 1/2" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating additional J-Retaining Flange for Liner Rip shaft side per listed assemblies in UL Fire Resistance Directory.

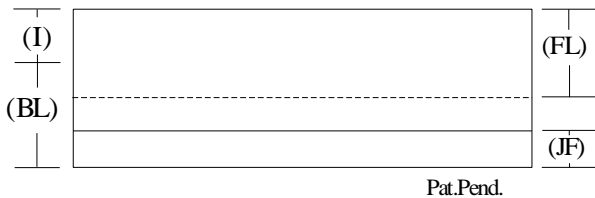


Widths (W)	Gauge
250 (2 1/2")	.030 (20)
400 (4")	.033 (20)
600 (6")	.043 (18)

Part Identification  
 Example: 400DJR1-30  

400	DJR1	- 30
/	/	/
Track Width	Profile	Gauge

DJR1 - Series (Fire Stop "short leg")

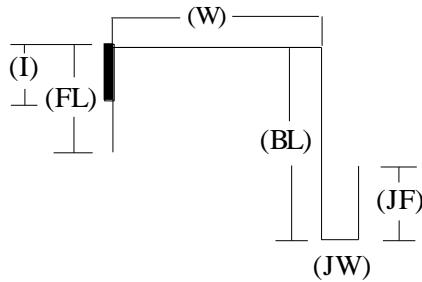

Profile	Front Leg (FL)	Back Leg (BL)	J-Width (JW)	J-Flange (JF)	Strip Width (I)	Joint Protection
DJR1	2.00"	3.00"	1.00"	1.25"	1.00"	.75"
DJRW1	2.00"	3.00"	1.00"	1.25"	1.25"	1.00"
DJRX1	2.00"	3.00"	1.00"	1.25"	1.75"	1.50"

### UL, ASTM & Code Standards

UL2079 & ULC S115-M95  
 ASTM E814, E1966, E2837  
 A1003, A653, A924, C645, C754, C955  
 AISI 2004 NAS  
 2009 IBC & 2013 CBC

### Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
 MR 5.1 & 5.2 - Regional Proximity  
 EQ 4.1 - Low Emitting Materials  
 EQ 9 - Enhanced Acoustical