


Product Profile Dimensions



PS2 - BlazeFrame "DL-CD" profiles with two solid legs and 1/2" gap

Composite Fire Stop/Framing for use in up to 2 hr rated wall assemblies. provides 100% unencumbered joint protection accommodates up to 3" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating with two solid legs for support of "free floating" studs per listed assemblies in UL Fire Resistance Directory. Fire Stop located 1/2" down accommodating up to 1/2" spray fireproofing applied to substrate.


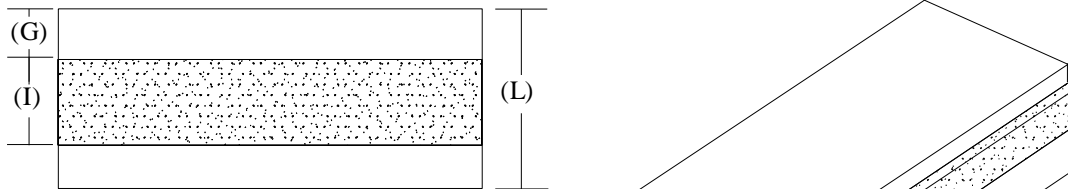


Pat. Pend

Widths (W)	Mil (Ga)	Part Identification
250 (2 1/2")	.030 (20)	Example: 362DL2FP34-30 362 / DL / 2 / FP34- / 30 Track Width / Profile / Series / Gap / Gauge
362 (3 5/8")	.033 (20)	
400 (4")	.043 (18)	
600 (6")	.054 (16)	
800 (8")	.068 (14)	

1 - Series (Fire Stop One Side)

2 - Series (Fire Stop Both Sides)

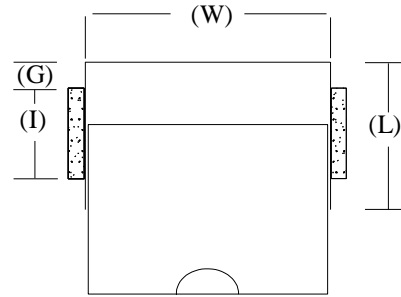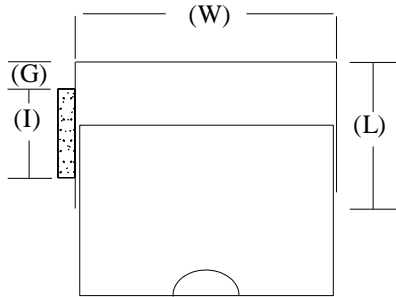

Profile	Leg Length (L)	Strip Width (I)	Gap Distance (G)	Joint Protection
DLFP34	2.50"	1.00"	.75"	.75"
DLWFP34	2.50"	1.25"	.75"	1.00"
DLXFP34	3.00"	1.75"	.75"	1.50"
DLZFP34	3.50"	2.25"	.75"	2.00"
DLYFP34	4.75"	3.25"	.75"	3.00"

UL, ASTM & Code Standards

UL2079, E814, E1966, ULC S115-M95
 A1003, A653, A924, C645, C754, C955
 AISI 2004 NAS
 2006 & 2009 IBC
 2007 CBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300