


# SAFE T SEAL

Smoke + Acoustic + Fire + Sealant

TM

## Smoke, Acoustic, & Fire - "Pre-Caulk"

- UL Listed - Lowest Leakage Rating
- Seismic Rated (with SAFE TRACK™)
- 1 and 2 Hour Fire Rated Assemblies
- Gasket Seal Flanking Paths & Avoid Exposed Bare Metal Transmission
- Third Party Certified up to STC 66

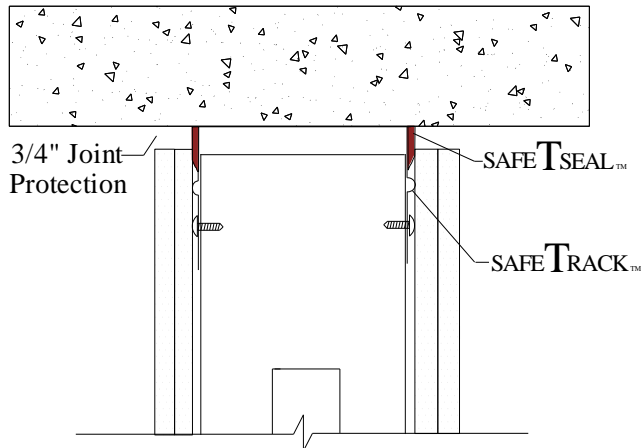

- **Less than 20% of Traditional Caulk Required** – for 3/4" Joint Protection (applied to SAFE TRACK™)
- Eliminate "Top of Web" Sealants
- Paintable & VOC Compliant
- Minimum 3 Year Shelf Life

## UL Listed Assemblies

- [HW-D-0737](#) - (Single Wall)
- [HW-D-0738](#) - (Shaft Wall)
- [HW-D-0739](#) - (Chase Wall)
- [WW-S-0071](#) - (Vertical Joint)
- [BW-S-0034](#) - (Bottom of Wall)

## Install Guides & Data: SAFE TSEAL™

- Min. 1/4" Bead Troweled Down or 1/8" Thick Ribbon Bead in Recess
- SAFE TRACK™ Surface Contaminant Free for "**Pre-Caulk**" Application
- Skin Over Time – 30 min
- Complete Cure – 24 hours

## Once Cured:

- Can Be Painted – Non-Solvent Paint
- Water and Humidity Resistant
- Unaffected by Freeze/Thaw Temps

## Material Properties:

- Complies with UL Accelerated Aging and High Humidity Testing
- Expansion Begins 375 F
- Expansion Greatest 575 F to 1100 F

## Limitations:

- Not For Use - Continuous Immersion
- Do Not Apply - Surface over 300 F

## Storage:

- Storage 35F (2C) to 120F (49C)
- Minimum 3 Year Shelf Life
- If Frozen Thaw Completely for Use
- Do Not Dilute, No Mixing Required

## Additional technical service

- Call: 425-869-6811
- Fax: 425-869-2300
- Email: support@blaze-frame.com